



Assembly Instructions

Traditional Table




*Thank you for choosing **A&L Furniture Co.***

We hope that this piece brings you many years of enjoyment!

For help with assembling your furniture,
or if you have missing hardware, please email us at
help@aandlfurniture.com or call us at 866-896-5747

PARTS (included)

(A) Table Top (1)



(B) Table Legs (2)



(C) Table Braces (2)



HARDWARE (included)

2³/₄" Bolts (4)

(a)



2¹/₂" Lag Screws (4)

(b)



Allen Wrench (1)

(c)



TOOLS NEEDED

Hammer

⁷/₁₆" Wrench or Socket

STEP 1

Lay the table top upside down on a clean flat surface. Attach the table legs to the inside of the 2x2 cross support on the table top. (See photo 1.) Insert the 2³/₄" bolts through the holes in the table legs and turn them into the metal inserts in the 2x2. (See photo 2.) Tighten with the Allen wrench. **Do not overtighten!**

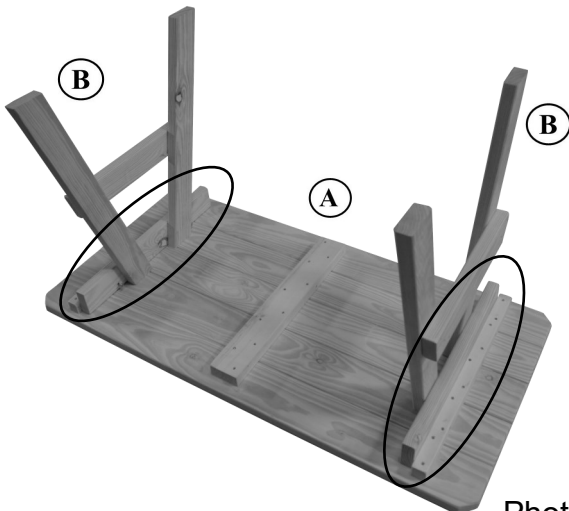


Photo 1

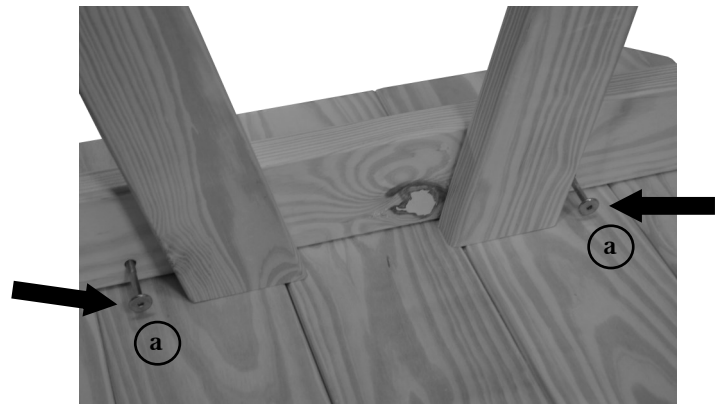


Photo 2

STEP 2

Attach the table braces with one end of the brace against the table top and the other end against the horizontal crosspiece on the leg. (See photo 3.) Insert 2¹/₂" lag screws through the holes in the table braces. (See photo 4.) Tap them lightly with the hammer to get them started into the wood. They are self drilling and will not crack the wood. Tighten using ⁷/₁₆" wrench or socket. **Do not overtighten** as this may cause them to break!

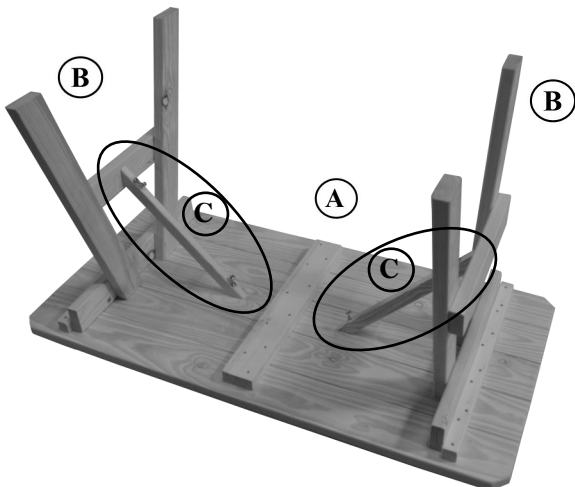


Photo 3

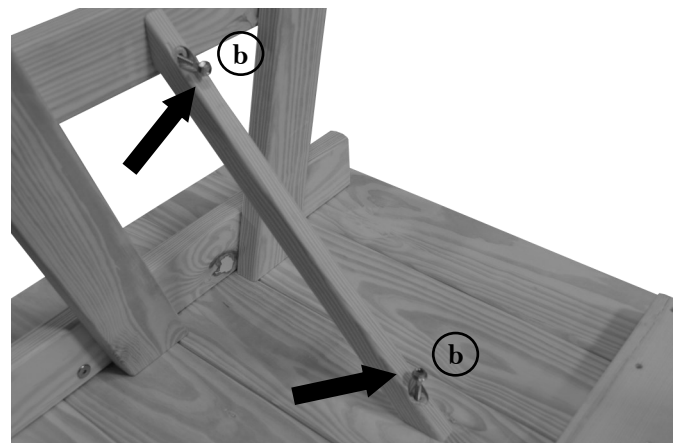


Photo 4