



Assembly Instructions

Poly 8ft Walk-in Table



*Thank you for choosing **A&L Furniture Co.***

We hope that this piece brings you many years of enjoyment!

For help with assembling your furniture,
or if you have missing hardware, please email us at
help@aandlfurniture.com or call us at 866-896-5747

PARTS (included)

- Ⓐ Table Top (1)
- Ⓑ Table Leg Assemblies (2)
- Ⓒ Bench Tops (4)
- Ⓓ 1"x5½"x14" Bench Leg Supports (8)
- Ⓔ 1"x5½"x32" Bench Bottoms (4)

HARDWARE (included)



- 2½" Screws (60)
- Square Drive Bit (1)

TOOLS NEEDED

- Power drill or screwdriver


STEP 1

Assemble the 4 bench legs. Take two leg supports and attach to a bench bottom. Put two 2½" screws in the predrilled holes in each end of the bench bottom and screw into one end of the leg supports. (See photo 1.)

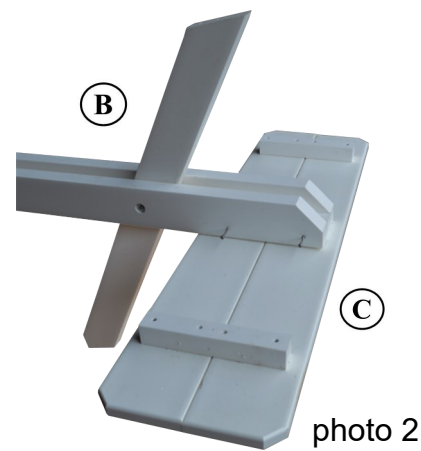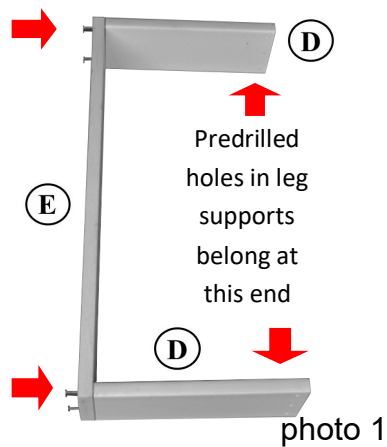

STEP 2

Unfold a table leg assembly & place upside down on a table. (See photo 2.) Take a bench top & place upside down with the center 2x2 between the 2x4 table leg support beams. Attach with two 2½" screws on each side. (See photos 2 & 3.)

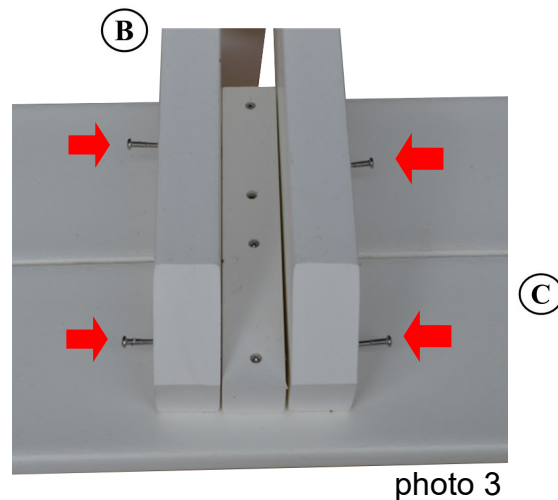

Keep 2x2 even with leg supports

STEP 3

Now take the bench leg assemblies from Step 1 and place them on the seat. Center with the 2x2 on the bench top. Attach with two 2½" screws on each end. (See photos 4 & 5.)

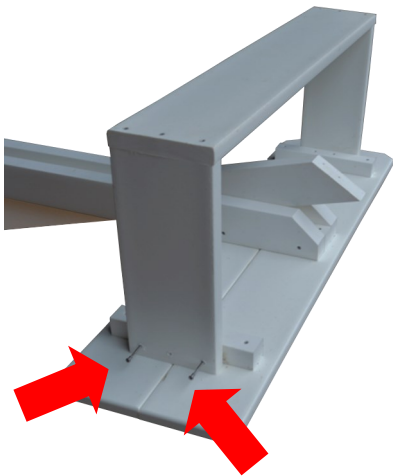


photo 4

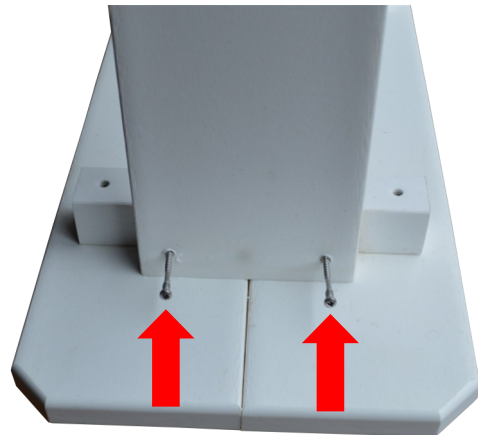


photo 5

Center on 2x2 strips

STEP 4

Fold the center leg down and attach to the bench bottom. Put one 2½" screw in the predrilled hole in the center of the bench bottom and screw up into the leg. (See photo 6.)

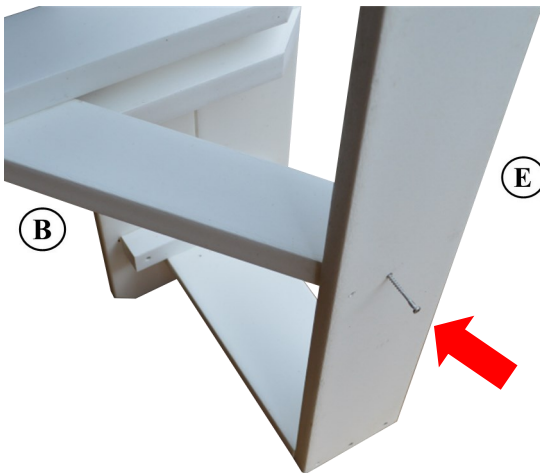


photo 6

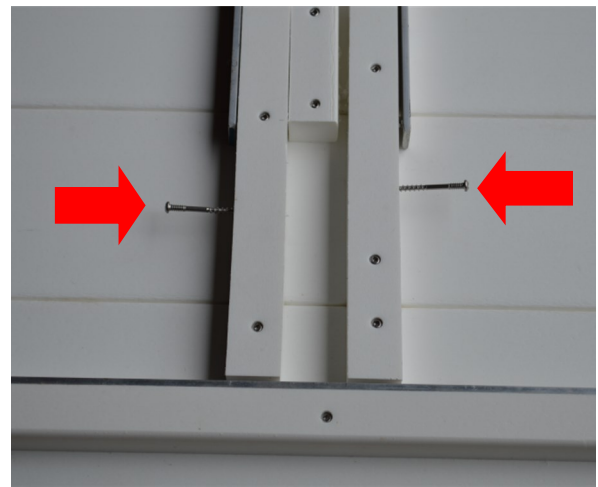


photo 7

STEP 5

Set the assembled leg assemblies on the floor side by side. Space them approximately 14" apart between the bench seats. Place the table top on the 4 legs and latch the legs into the 4 notches between the 2x2 braces underneath the table top. Put one 2½" screw into each 2x2 and screw into the top of the legs. (See photo 7.)